

CALI
HARDWOODS™

GEOWOOD®

www.CaliFloors.com




Capistrano Oak

Real Hardwood Floors for Real Life™


Perfect for new homeowners or those looking to redesign on a budget, Cali GeoWood puts real hardwood floors within reach. Each plank features a beauty layer of sustainably farmed bamboo or lumber from Lacey Act Compliant managed forests over GeoCore® -- a strengthening limestone composite foundation. This stone core makes planks more water resistant, faster to install, and better protected against indentation. GeoWood's revolutionary construction translates to 50% better dimensional stability, meaning less expansion and contraction even in high-moisture environments like kitchens, bathrooms, and basements.

Available Colors


Oak

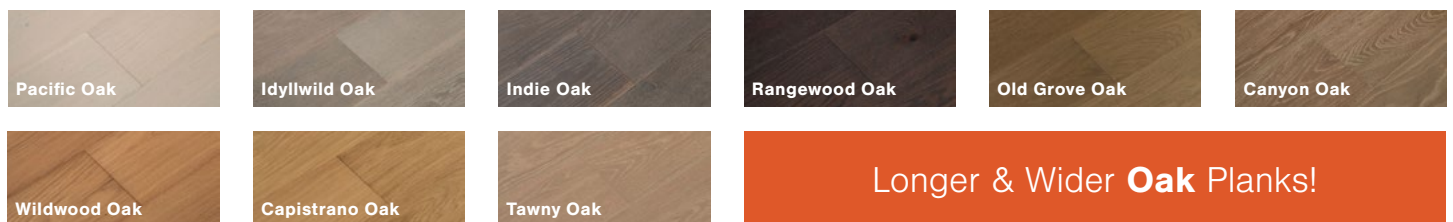

Bamboo

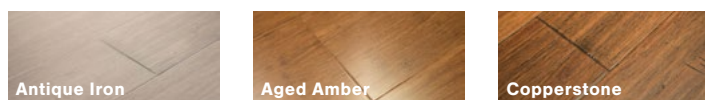

Maple





HiFi
Imaging



Easy to
Clean



Fast
Install



Moisture
Resistant



Earth
Friendly



Built to
Last



Canyon Oak

The Water Resistant Wood Floor

AquaDefy technology ensures diehard moisture protection. Finally, a wood floor that can reach every room in the house, both above and below grade.

GeoCore: Bad to the Bone

This backbone of limestone composite resists indentation and delivers 50% better dimensional stability (less expansion and contraction), meaning no transition pieces are required.

A Truly DIY Hardwood Installation

Simple-to-cut planks with a precise click-lock milling system make installing GeoWood easy for the first-timer or veteran contractor alike.

Made to Withstand It All

Shielded by an aluminum oxide scratch resistant finish, GeoWood planks are better prepared to face the wear and tear of everyday life.

Accessories



Construction	100% Waterproof GeoCore® (SPC Composite) with 2.0 mm attached IXPE Underlayment
Plank Length	Oak: Random Length up to 74-13/16" Bamboo: 36-1/4" Maple: Random Length up to 74-13/16"
Plank Width	Oak: 7-15/32" Bamboo: 5-19/32" Maple: 7-1/2"
Plank Thickness	Oak: 9mm Bamboo: 7mm Maple: 9mm
Sqft./Box	Oak: 23.31 sqft. Bamboo: 14.06 sqft. Maple: 23.31 sqft.
Milling	Click
Installation Method	Floated or Glue Down
Finish	Aluminum Oxide
Residential Warranty	50 Year
Commercial Warranty	15 Year Light Commercial
Resin	Low Emitting VOC & Prop 65 Compliant (Test Results Available Upon Request)
Radiant Heat Compatible	Yes (up to 85° F)
LEED Points	EQC4.3
Fire Rating	Oak: <i>Testing in Progress</i> Bamboo: 0.48 W/cm2 (Class 1) Maple: <i>Testing in Progress</i>
Certification	FloorScore® Certified

Note: For the most up-to-date specification information, please visit www.CaliFloors.com