


Premium Recycled Felt Flooring Underlayment

Model # 1102002200
UPC # 811465027415

For use over wood subfloors



Keep floors warm in winter and cool in summer

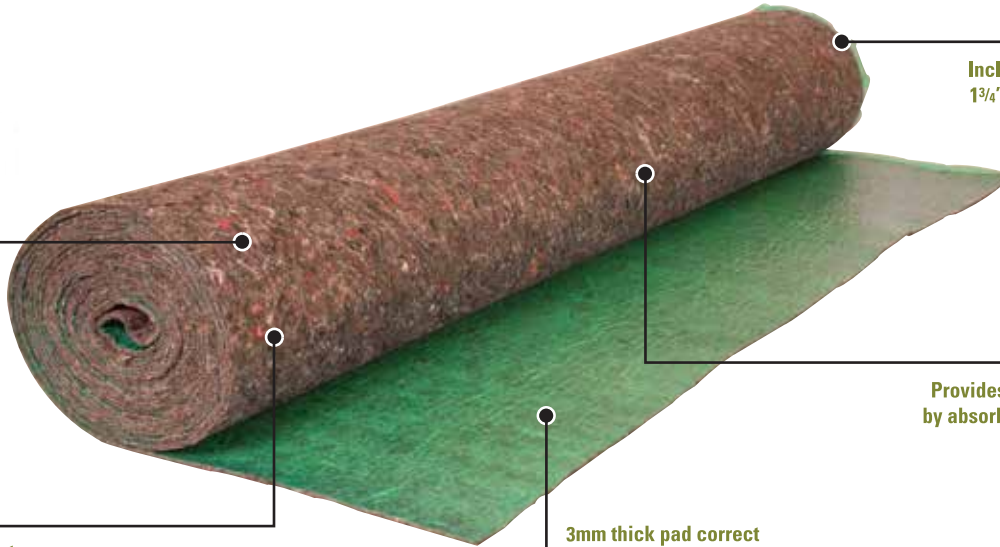

Includes adhesive strip and 1 3/4" overlap film for linking multiple rolls

Provides deep, rich sound by absorbing noise instead of deflecting it

Extremely high temperature manufacturing process compresses and treats fibers

3mm thick pad correct minor sub-floor imperfections

<p>IMPACT IMPACT</p> <p>SUPER FELT OTHERS</p>	<p>3MM</p>			
Sound Reduction	Cushions Flooring	Radiant Heat	Recycled Fibers	Levels Imperfections

Felt is a 3mm thick insulating underlayment made to reduce noise and help cushion flooring. By absorbing noise instead of deflecting it, Felt provides a deep, rich sound. This felt underlayment is made from recycled fibers and compressed using a high heat manufacturing process. The film overlay includes an adhesive strip and 1-3/4" overlap for linking multiple rolls.

Item Code:	1102002200
Unit of Measure:	Ea.
Coverage:	100 sq. ft. per roll
Width of roll:	44"
Length of roll:	27.3 ft.
Thickness:	3 mm
Weight per roll:	10.11 lbs.
Diameter of roll:	7.5"
Density:	14.5 lbs./ft. ³
Perm rating:	0.275

TECHNICAL SPECIFICATIONS

IIC (Impact Sound Transmission Test)	67
STC (Sound Transmission Loss Test)	66

Both tests measure sound transference from an upper level room to a lower level room. The IIC measures sound such as moving furniture and walking, while the STC measures sound such as voices and television. Minimum sound rating required by most building codes and architects is 50.